



# X-TRAC


## TACTICAL REMOTE ACCESS CONTROL

### MANUAL



X-TRAC REV. 1 – JAN., 2017

**Important Export Restrictions!** Commodities, products, technologies and services contained in this manual are subject to one or more of the export control laws and regulations of the US BIS-Department of Commerce, Export Administration Regulations. It is unlawful and strictly prohibited to export, or attempt to export or otherwise transfer or sell any hardware or technical data or furnish any service to any foreign person, whether abroad or in the United States, for which a license or written approval of the U.S. Government is required, without first obtaining the required license or written approval from the Department of the U.S. Government having jurisdiction. Diversion contrary to U.S. law is prohibited.

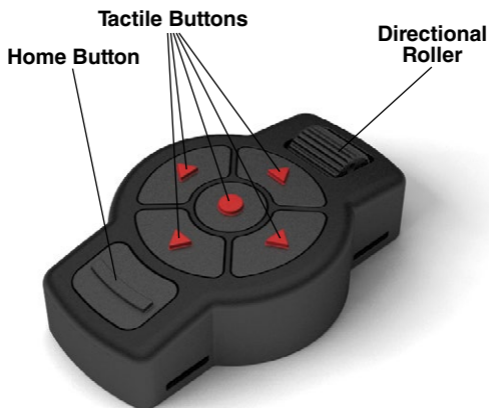

## 1. SPECIFICATIONS

<b>Bluetooth</b>	4.1
<b>Environmental rating</b>	Water resistant
<b>Battery type</b>	CR2450
<b>Controls</b>	6 buttons and a Roller
<b>Dimensions</b>	3.2" x 2" x 0.8" 80 x 50 x 21 mm
<b>Weight</b>	1.76 oz / 50 g
<b>Warranty</b>	2 years

\* ATN reserves the right to change the above specifications at any time without notice.

## 2. DESCRIPTION

The X-TRAC was designed to aid the shooter in a dynamic shooting environment.



Connect via Bluetooth to your ATN Smart Device and control all the functions and features without touching the scope. Have all your controls at your fingertips and never get bogged down in a mission critical situation. Six Tactile buttons and a Directional Roller with Touch Feedback gives you precise control over all your features. Using your Ballistic Calculator, Smart Range Finder, Environmental Adjustments, etc on your Smart HD Scopes just got easier.

## 3. INCLUDED

- Remote control
- Battery
- Velcro straps x 2
- Manual

## 4. CONNECTING THE X-TRAC

4.1 Activate the Bluetooth function in your ATN Smart HD Scope.

4.2 Enter the system setting from the menu.

4.3 Select the Settings Category.

4.4 Select the WiFi and Bluetooth subcategory.

4.5 Select Remote Controller.

4.6 Select Pair. You should see a half circle move around in the upper right side of the screen around the Bluetooth Icon.

4.7 Press and hold the Home Button and Top Arrow Button closest to the Directional Roller for 2 seconds, this will pair the X-TRAC to your scope.

## 5. X-TRAC BUTTON ORIENTATION

You have two options on how to have the X-TRAC buttons oriented when mounted on a rifle.

1) Having the Directional Roller in Front.

2) Having the Directional Roller in the Back.

5.1 Enter the system setting from the menu.

5.2 Select the Settings Category.

5.3 Select the WiFi and Bluetooth subcategory.

5.4 Select Remote Controller Orientation.

5.5 Select Wheel Front or Wheel Back.

## **6. BATTERY REPLACEMENT**

6.1 Unscrew the Battery using a coin or another object turn counter clock wise.

6.2 Remove the CR2450 Battery

6.3 Replace with New CR2450 Battery

6.4 Replace the battery cover and turn clock wise.



**AMERICAN  
TECHNOLOGIES  
NETWORK CORP.**

For customer service  
and technical support, please contact  
**American Technologies Network Corp.**

1341 San Mateo Avenue,  
South San Francisco, CA 94080.  
Phone: **800-910-2862, 650-989-5100.**  
E-mail: **service@atncorp.com.**  
Site: **www.atncorp.com**

The information in this manual furnished for informational use only, is subject to change without notice, is not to be construed as a commitment by ATN Corp.

ATN Corp. assumes no responsibility or liability for any errors or inaccuracies that may appear in this book.

©2017 ATN Corp. All rights reserved.